

**BORA hob extraction system PKAS3AB All Black, Professional 3.0**
[> Web link](#)


**Article no.**  
40.002.234.00

**VRG**  
2.31  
**Price CHF**  
4083.- O excl. VAT

**Product description**
**Product description BORA Professional 3.0 hob extraction system PKAS3AB All Black**

The PKAS3AB is a compact system in which the fan motor and hob extractor form a single unit.

Power control via control knob  
Power level indicator  
Electric shutter  
Shutter sensor  
Stainless steel grease filter  
Grease filter sensor  
Automatic hob extractor  
Automatic run-on  
Filter service indicator  
Interface for external devices  
Safety shut-off  
Connection option for an additional BORA fan module  
All Black Version, DLC coated

**Technical data**

Supply voltage  
220 - 240 V  
Frequency  
50 Hz  
Maximum power consumption  
550 W  
Weight (incl. accessories and packaging)  
12.5 kg  
Dimensions (width x depth x height)  
468 x 540 x 199 mm  
Power levels  
1-9, P  
Exhaust air connection  
BORA Ecotube 245 x 89 mm

**Scope of delivery**

PKAS3 hob extraction system incl. fan motor  
Operating and installation instructions  
Height compensation plate set  
Mounting clamps  
Control knob All Black  
Stainless steel grease filter  
Filter tray  
Maintenance tray  
Closing flap  
Cable control knob - interface/extractor  
Mains cable 1 m with plug type 12, 10 A

**Planning information**

Possible as recirculation or exhaust air system  
Can be combined with all BORA Professional hobs and BORA Universal fan modules  
Worktop height can be individually adjusted  
Worktop depth:  $\geq 700$   
Type of installation: flush-mounted or top unit  
The drawers or shelves in the base unit must be removable for maintenance and cleaning purposes.  
The BORA Ecotube duct system is optimally matched to the BORA hob extractors and guarantees 100% function and best performance. An additional universal fan module must be used if the exhaust air path is longer than 6 m or if there are high pressure losses.  
Exhaust air routing only possible to the right

**Planning note:** With these units, the duct connection is designed for the BORA Ecotube duct system. To connect BORA Ecotube (connection 245 x 89 mm) with Naber connections (222 x 89 mm), an adapter (EFA, 40.001.779.00) is available / can be ordered separately.


**BORA hob extraction system PKAS3AB All Black, Professional 3.0**[> Web link](#)**Accessory**

## Optional accessories

[> Weblink](#)

40.002.034.00 / CHF

135.-

BORA socket USTJAB  
All Black[> Weblink](#)

80.100.016.00 / CHF

359.-




Ventilation planning

[> Weblink](#)

80.100.017.00 / CHF

192.-

Revision of the planning

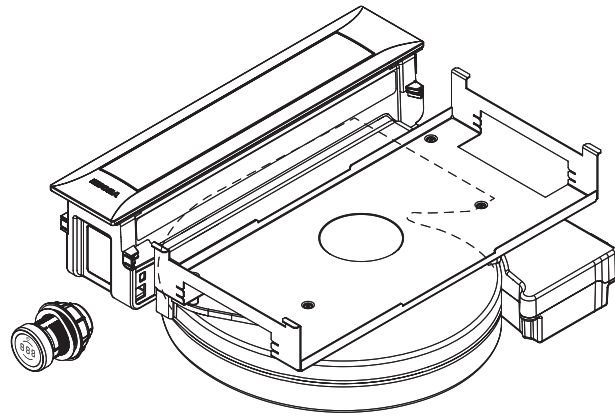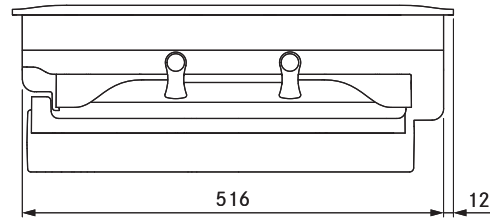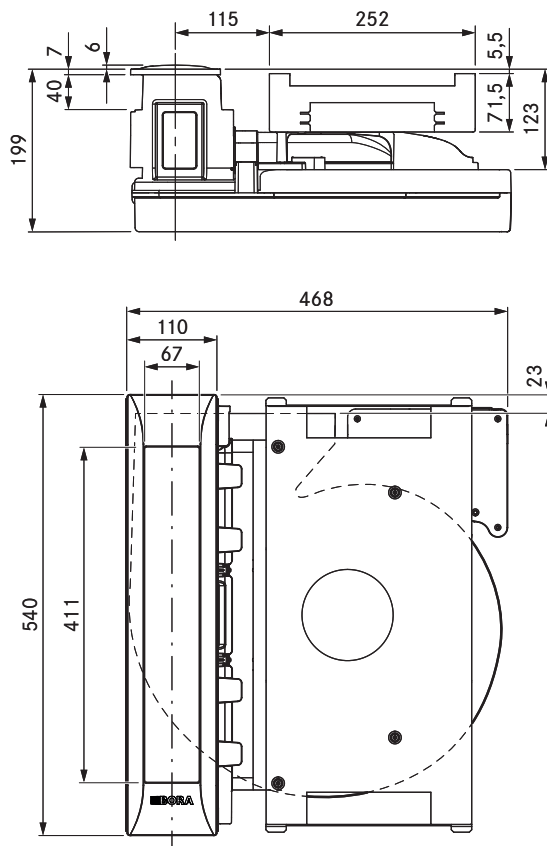

## technical data

Supply voltage	220 – 240 V
Frequency	50/60 Hz
Maximum power consumption	550 W
Power supply cable length	2 m
Dimensions (width x depth x height)	468 x 540 x 199 mm
Weight (incl. accessories/packaging)	12.5 kg
Cooktop extractor power levels	1 – 9, P
duct connection	BORA Ecotube

## Product description

- Intuitive control knob
- DLC (diamond-like-carbon) coated
- Automatic cover flap
- Premium design
- Simple cleaning
- Integrated grease drip pan
- Modular system
- Automatic extractor control
- Maximum storage space
- Integrated fan

## Scope of delivery

- Cooktop extractor system with integrated fan PKAS3AB
- Control knob
- 4 x Pro knob ring All Black PKR3AB
- stainless steel grease filter
- Filter tray
- Maintenance tray
- cover flap
- connection cable for the control knob
- operating and installation instructions
- height adjustment plate set
- Mounting clamps
- Power supply cable with type E + F plugs

## Accessories

- PKA1FF stainless steel grease filter
- PKA1VK cover flap
- PKA1FW filter tray
- UNLI type I power supply cable (AUS)
- UNLJ type J power supply cable (CH)
- UNLG type G power supply cable (GB-IE)
- UNLB type B power supply cable (PH)
- UNLH type H power supply cable (IL)

## product- and planning instructions

- Suitable for use as a recirculation or exhaust system
- Compatible with all BORA Professional 3.0 cooktops and BORA Universal fan modules
- In addition, four knob ring All Black are included for the adjacent cooktops
- Use of an additional fan module is possible for very long or complex exhaust air channels
- The worktop height can be adjusted as necessary
- Worktop depth:  $\geq 700$  mm
- Installation type: flush or surface-mounted
- The drawers and/or shelves in the floor unit must be removable for maintenance and cleaning purposes
- The BORA Ecotube duct system is optimally tailored to the BORA cooktop extractors and guarantees 100% functionality and optimum performance
- The Professional cooktop extractor system can be combined with all BORA sockets
- Duct connection on the back of the appliance