

BORA PKC3 HiLight glass ceramic hob, Professional 3.0
[> Web link](#)


Article no.
40.002.235.00

VRG
2.31
Price CHF
1547.- O excl. VAT

Product description
Product description BORA Professional 3.0 HiLight glass ceramic hob PKC3

HiLight glass ceramic hob with 3-circuit/2-circuit connection

Residual heat indicator

Child safety lock

Demo mode

Can be mounted rotated by 180

Configuration menu

Timer function

Safety shut-off

Automatic boil-on function

Digital power level display on control knob

Pause function

Keep warm function

Technical data

Supply voltage

400 V

Frequency

50 Hz

Maximum power consumption

4.4 kW

Maximum connected load

4.4 kW

Fuse protection at least

2 x 16 A

Power levels

1-9 (connection of 2 / 3 circuits)

Weight

8.7 kg

Surface material

SCHOTT CERAN

Mains cable

1,5 m

Dimensions (width x depth x height)

370 x 540 x 73 mm

Cooking zone front size

Ø 120 / 180 / 235 mm

Cooking zone front Power

800 / 1600 / 2500 W

Number of circuits cooking zone front

3

Cooking zone rear Size

Ø 120 / 200 mm

Cooking zone rear Power

800 / 1900 W

Number of circuits rear cooking zone

2

Scope of delivery:

HiLight glass ceramic hob PKC3

2 x control knobs

Mounting brackets

Height compensation plate set

Operating and assembly instructions

2 x Connecting cable for operating toggle

Connecting cable to fume cupboard

Mains cable (L1, L2, N, PE), without plug

BORA PKC3 HiLight glass ceramic hob, Professional 3.0[> Web link](#)**Accessory**

Optional accessories



> Weblink
40.001.767.00 / CHF 97.-
BORA socket USTJ



> Weblink
40.002.034.00 / CHF
135.-
BORA socket USTJAB
All Black







> Weblink
40.001.775.00 / CHF 19.-
BORA Glass ceramic
scraper UGS

Compatible Articles

> Weblink
40.002.243.00 / CHF 74.-
BORA Lock collar PKR3
Prof. 3.0



> Weblink
40.002.244.00 / CHF
111.-
BORA Lock collar
PKR3AB Prof. 3.0

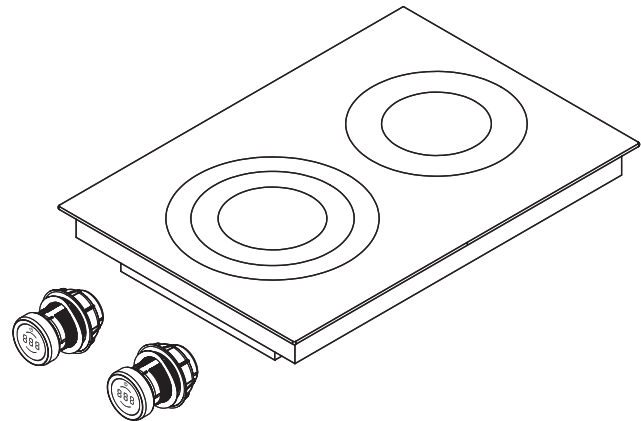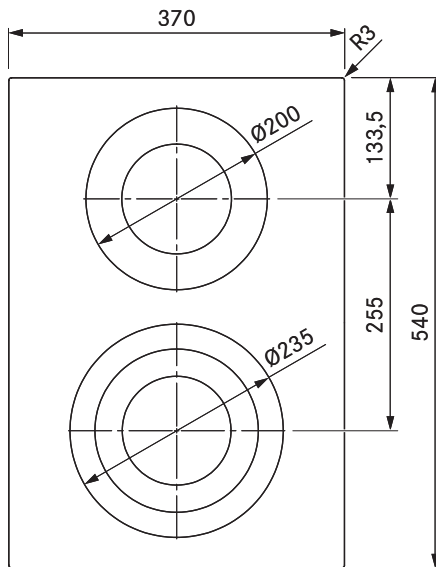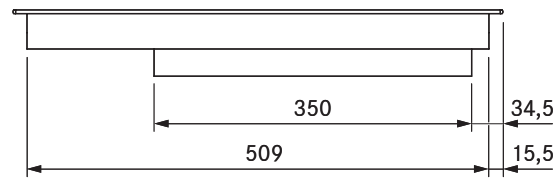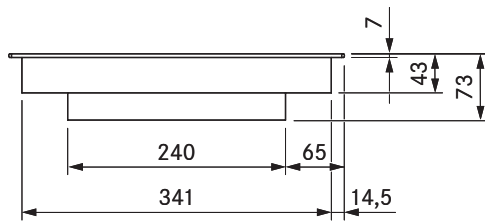

technical data

Supply voltage	380 - 415 V 2N
Frequency	50/60 Hz
Maximum power consumption	4.4 kW
Maximum power rating	4.4 kW
Minimum fuse protection	2 x 16 A
Power supply cable length	1,5 m
Dimensions (width x depth x height)	370 x 540 x 73 mm
Weight (incl. accessories/packaging)	8.7 kg
Surface material	SCHOTT CERAN®
Cooktop power levels	1 - 9 (switching of 2/3 rings)
Number of cooking zone circuits front	3
Number of cooking zone circuits rear	2
Size of front cooking zone	Ø 120 / 180 / 235 mm
Size of rear cooking zone	Ø 120 / 200 mm
Front cooking zone output	800 / 1600 / 2500 W
Rear cooking zone output	800 / 1900 W

Product description

- Intuitive control knob
- Variable heat retention function
- 2-ring switching
- 3-ring switching
- childproofing feature
- Cooking zone timers
- Timer
- Pause function
- automatic heat up function
- Demo mode

Scope of delivery

- HiLight cooktop, 3-ring/2-ring PKC3
- 2 x control knobs
- 2 x connection cables for the control knobs
- Connection cable to the extractor
- operating and installation instructions
- mounting straps
- height adjustment plate set

product- and planning instructions

- Rotation by 180° possible during installation
- Ensure sufficient ventilation of the area below the cooktop.