

BORA PKCB3 HiLight glass ceramic hob, Professional 3.0
[> Web link](#)


Article no.
40.002.236.00

VRG
2.31
Price CHF
1583.- O excl. VAT

Product description
Product description BORA Professional 3.0 HiLight glass ceramic hob PKCB3

HiLight glass-ceramic hob with 3-circuit / roaster activation
Residual heat indicator
Child safety lock
Demo mode
Can be installed rotated by 180
Configuration menu
Timer function
Safety shut-off
Automatic boil-on function
Digital power level display on control knob
Pause function
Keep warm function

Technical data

Supply voltage
400 V
Frequency
50 Hz
Maximum power consumption
5.1 kW
Maximum connected load
5.1 kW
Fuse protection at least
2 x 16 A
Power levels
1-9 (connection of 2 / 3 circuits / roaster)
Weight
8.9 kg
Surface material
SCHOTT CERAN
Mains cable
1,5 m
Dimensions (width x depth x height)
370 x 540 x 73 mm
Cooking zone front size
Ø 120 / 180 / 235 mm
Cooking zone front Power
800 / 1600 / 2500 W
Number of circuits cooking zone front
3
Cooking zone rear Size
Ø 165 / 290 x 165 mm
Cooking zone rear Power
1500 / 2600 W
Number of circuits rear cooking zone
2

Scope of delivery:

HiLight glass ceramic hob PKCB3
2 x control knobs
Mounting brackets
Height compensation plate set
Operating and assembly instructions
2 x Connecting cable for operating toggle
Connecting cable to fume cupboard
Mains cable (L1, L2, N, PE), without plug

BORA PKCB3 HiLight glass ceramic hob, Professional 3.0[> Web link](#)**Accessory**

Optional accessories



> Weblink
40.001.767.00 / CHF 97.-
BORA socket USTJ



> Weblink
40.002.034.00 / CHF
135.-
BORA socket USTJAB
All Black







> Weblink
40.001.775.00 / CHF 19.-
BORA Glass ceramic
scraper UGS

Compatible Articles

> Weblink
40.002.243.00 / CHF 74.-
BORA Lock collar PKR3
Prof. 3.0



> Weblink
40.002.244.00 / CHF
111.-
BORA Lock collar
PKR3AB Prof. 3.0

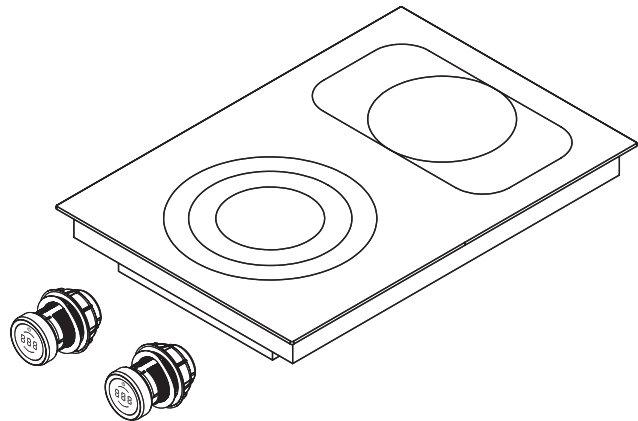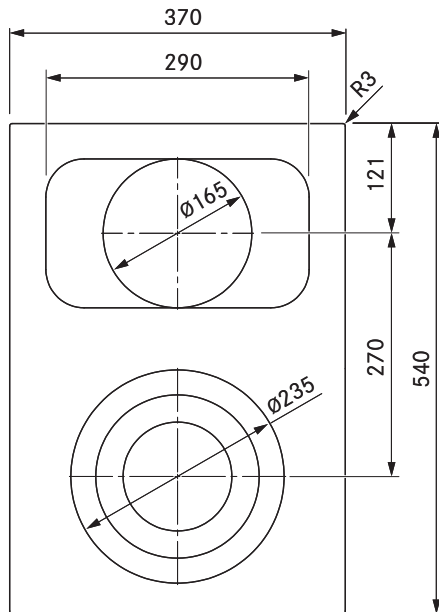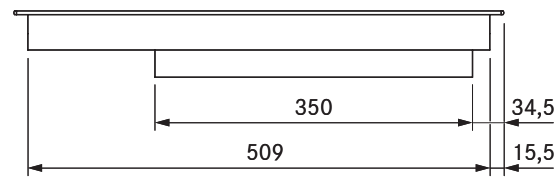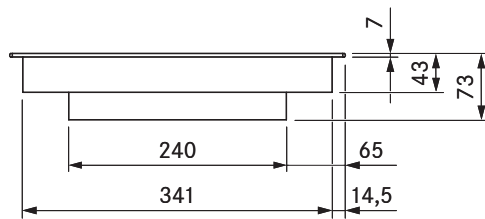

technical data

Supply voltage	380 – 415 V 2N
Frequency	50/60 Hz
Maximum power consumption	5.1 kW
Maximum power rating	5.1 kW
Minimum fuse protection	2 x 16 A
Power supply cable length	1,5 m
Dimensions (width x depth x height)	370 x 540 x 73 mm
Weight (incl. accessories/packaging)	8.9 kg
Surface material	SCHOTT CERAN®
Cooktop power levels	1 – 9 (switching of 2/3 rings/roaster)
Number of cooking zone circuits front	3
Number of cooking zone circuits rear	2
Size of front cooking zone	Ø 120 / 180 / 235 mm
Size of rear cooking zone	Ø 165 mm / 290 x 165 mm
Front cooking zone output	800 / 1600 / 2500 W
Rear cooking zone output	1500 W / 2600 W

Product description

- Intuitive control knob
- Variable heat retention function
- Roaster switching
- 3-ring switching
- childproofing feature
- Cooking zone timers
- Timer
- Pause function
- automatic heat up function
- Demo mode

Scope of delivery

- HiLight cooktop, 3-ring/roaster PKCB3
- 2 x control knobs
- 2 x connection cables for the control knobs
- Connection cable to the extractor
- operating and installation instructions
- mounting straps
- height adjustment plate set

product- and planning instructions

- Rotation by 180° possible during installation
- Ensure sufficient ventilation of the area below the cooktop.