

**BORA PKI3 induction glass ceramic hob, Professional 3.0**[> Web link](#)

**Article no.**  
40.002.238.00

**VRG**  
2.31  
**Price CHF**  
2238.- O excl. VAT

**Product description****Product description BORA Professional 3.0 PKI3 induction glass ceramic hob**

Keep warm function  
Power level  
Bridge function  
Residual heat indicator  
Pause function  
Timer function  
Configuration menu  
Can be mounted rotated 180°  
Cooking zone display on control knob  
Demo mode  
Pot detection  
Automatic cooking system  
Digital power level display on the control knob and on the hob  
Child safety  
Safety switch off

Digital power level display on the hob. Power level display can be installed on the right or left side of the hob (hob can be installed rotated by 180°).

**Technical data****Supply voltage**

230 V

**Frequency**

50 Hz

**Maximum power consumption**

3,68 kW

**Maximum connection value**

3,68 kW

**Minimum fuse protection**

1 x 16 A

**Power level**

1-9, P

**Weight (incl. accessories / packaging)**

8,0 kg

**Material surface**

SCHOTT CERAN

**Mains connection**

1,5 m

**Dimensions (W x D x H)**

370 x 540 x 52 mm

**Front cooking zone size**

230 mm

**Front cooking zone performance**

2300 W

**Front cooking zone power level**

3680 W

**Rear cooking zone size**

165 mm

**Rear cooking zone performance**

1400 W

**Rear cooking zone power level**

2200 W

**Scope of delivery**

Surface induction ceramic glass cooktop PKI3  
2 x control knobs  
Mounting brackets  
Height adjustment plate set  
Operating and installation instructions  
2 x connection cables Control knob  
Connection cable to extractor

**BORA PKI3 induction glass ceramic hob, Professional 3.0**[> Web link](#)

Mains connection (L, N, PE) without plug

**Planning guidelines**

Please note that induction-proof cookware is required for induction cooktops

Please provide sufficient ventilation below the induction cooktop

**Planning note for installation in 2 / 1 combinations** (2 induction hobs, 1 hob extractor):

Hobs with power level display can be installed either centrally (adjacent to hob extractor on both sides) or facing outwards.

**Accessory**

## Optional accessories



[> Weblink](#)

40.001.767.00 / CHF 97.-  
BORA socket USTJ



[> Weblink](#)

40.002.034.00 / CHF 135.-  
BORA socket USTJAB  
All Black



[> Weblink](#)

40.001.775.00 / CHF 19.-  
BORA Glass ceramic  
scraper UGS

**Compatible Articles**





[> Weblink](#)

40.002.244.00 / CHF 111.-  
BORA Lock collar  
PKR3AB Prof. 3.0



[> Weblink](#)

40.002.243.00 / CHF 74.-  
BORA Lock collar PKR3  
Prof. 3.0

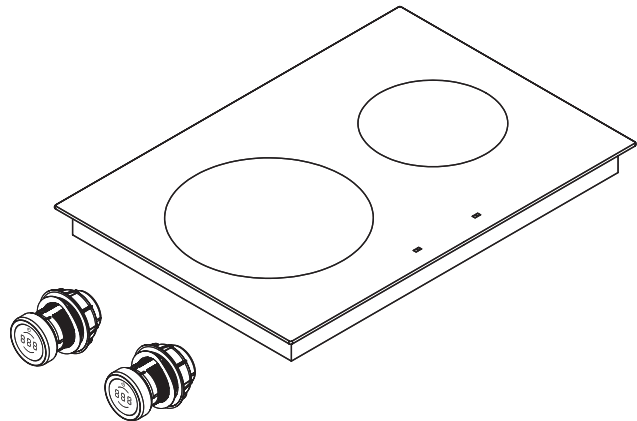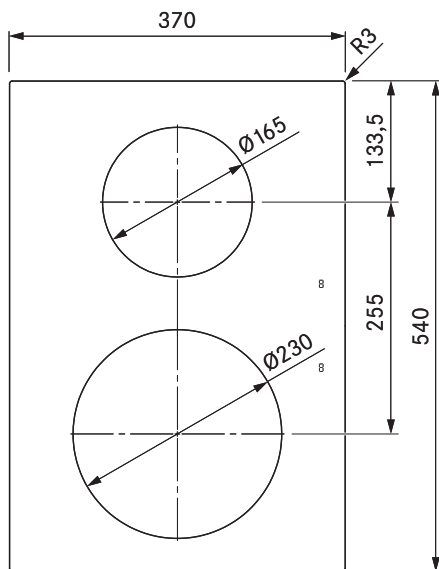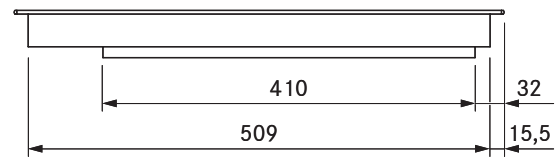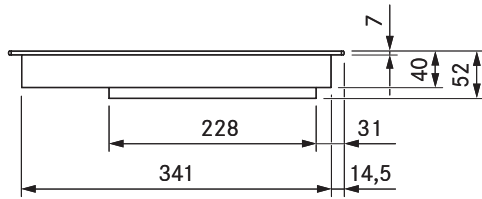

#### technical data

Supply voltage	220 - 240 V
Frequency	50/60 Hz
Maximum power consumption	3.68 kW
Maximum power rating	3.68 kW
Minimum fuse protection	1 x 16 A
Power supply cable length	1,5 m
Dimensions (width x depth x height)	370 x 540 x 52 mm
Weight (incl. accessories/packaging)	8.0 kg
Surface material	SCHOTT CERAN®
Cooktop power levels	1 - 9, P
Size of front cooking zone	Ø 230 mm
Size of rear cooking zone	Ø 165 mm
Front cooking zone output	2300 W
Rear cooking zone output	1400 W
Front cooking zone power setting output	3680 W
Rear cooking zone power setting output	2200 W

#### Product description

- Intuitive control knob
- Performance level display on the cooktop
- Variable heat retention function
- childproofing feature
- Cooking zone timers
- Timer
- Pause function
- automatic heat up function
- pan size recognition
- Demo mode

#### Scope of delivery

- Induction cooktop PKI3
- 2 x control knobs
- 2 x connection cables for the control knobs
- Connection cable to the extractor
- operating and installation instructions
- mounting straps
- height adjustment plate set

#### product- and planning instructions

- Rotation by 180° possible during installation
- Please note that induction-compatible cookware must be used on induction cooktops
- Ensure sufficient ventilation of the area below the cooktop.