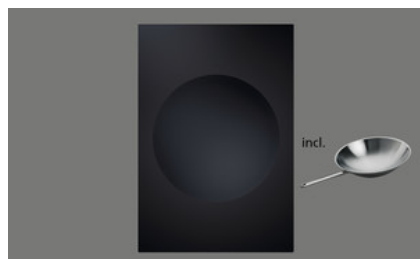


BORA Set PKIW3 + HIW1, Professional 3.0
[> Web link](#)


Article no.
40.002.287.00

VRG
2.31

Price CHF
3367.- O excl. VAT

Product description

Product description BORA Professional 3.0 Set offer consisting of PKIW3 induction glass ceramic wok and HIW1 induction wok pan with wok lid

Power level
Residual heat indicator
Pause function
Timer function
Configuration menu
Cooking zone display on control knob
Demo mode
Pot detection
Automatic boil-on function
Digital power level display on the control knob
Child safety lock
Safety shut-off

Technical data

Supply voltage
220 - 240 V
Frequency
50 Hz
Maximum power consumption
3.0 kW
Maximum connected load
3.0 kW
Fuse protection at least
1 x 16 A
Power levels
1-9, P
Weight (incl. accessories / packaging)
11 kg
Surface material
SCHOTT CERAN
Mains cable
1,5 m
Dimensions (width x depth x height)
370 x 540 x 128 mm
Cooking zone size
Ø 310 mm
Cooking zone power
2400 W
Cooking zone power level
3000 W

Scope of delivery:

Induction glass ceramic wok PKIW3
2 x control knobs
Mounting lugs
Height compensation plate set
Operating and assembly instructions
2 x Connecting cable for operating toggle
Connecting cable to fume cupboard
Mains cable (L, N, PE), without plug
Induction wok pan HIW1, stainless steel Ø 36 cm

Planning information:

Due to the overall height of 128 mm, the appliance cannot be installed above the exhaust air duct.
Ensure sufficient ventilation below the induction hob.
Wok pan diameter 310 mm
Use a wok which loses its magnetic properties as the temperature rises (overheating protection). We recommend using the wok pan we offer.

BORA Set PKIW3 + HIW1, Professional 3.0

[> Web link](#)

Accessory

Optional accessories



> Weblink
40.001.767.00 / CHF 97.-
BORA socket USTJ



> Weblink
40.002.034.00 / CHF 135.-
BORA socket USTJAB
All Black



> Weblink
40.001.775.00 / CHF 19.-
BORA Glass ceramic
scraper UGS





Compatible Articles



> Weblink
40.002.243.00 / CHF 74.-
BORA Lock collar PKR3
Prof. 3.0



> Weblink
40.002.244.00 / CHF 111.-
BORA Lock collar
PKR3AB Prof. 3.0

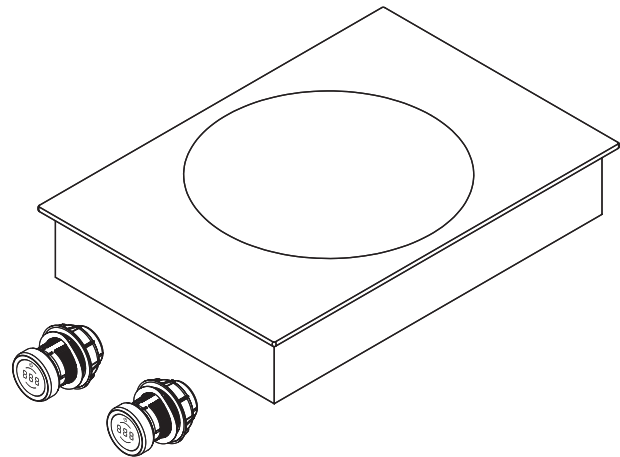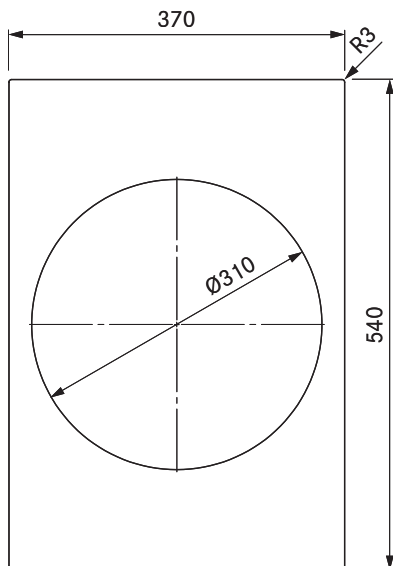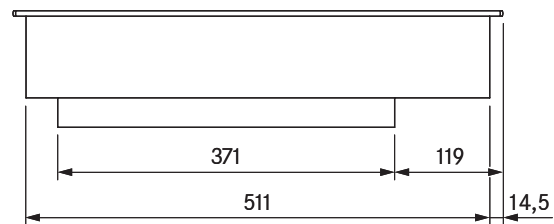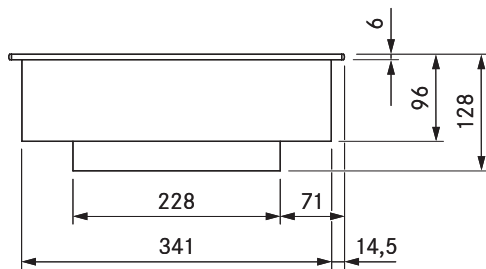

technical data

Supply voltage	220 – 240 V
Frequency	50/60 Hz
Maximum power consumption	3.0 kW
Maximum power rating	3.0 kW
Minimum fuse protection	1 x 16 A
Power supply cable length	1,5 m
Dimensions (width x depth x height)	370 x 540 x 128 mm
Weight (incl. accessories/packaging)	9.5 kg
Surface material	SCHOTT CERAN®
Cooktop power levels	1 – 9, P
Size of cooking zone	Ø 310 mm
Cooking zone output	2400 W
Cooking zone power setting output	3000 W

Product description

- Intuitive control knob
- Variable heat retention function
- childproofing feature
- Cooking zone timers
- Timer
- Pause function
- automatic heat up function
- Increased resistance against breakage
- Modular system
- Demo mode

Scope of delivery

- Induction wok cooktop PKIW3
- 2 x control knobs
- 2 x connection cables for the control knobs
- Connection cable to the extractor
- operating and installation instructions
- height adjustment plate set
- mounting straps

Accessories

- HIW1 induction wok, Controlinduc®, stainless steel, Ø 360 mm

product- and planning instructions

- The installation height of 128 mm means that the device cannot be installed over the exhaust ducting
- Ensure sufficient ventilation of the area below the cooktop.
- Glass ceramic mould Diameter 310 mm
- Use a wok that loses its magnetic properties when the temperature rises (overheating protection). We recommend using the BORA induction wok.